

Technical Data Sheet



CHOCO LOVE 4.0 SR 160W

Art. Nr.: N/A

LT product id. code: 65592

Main Application:
Equivalency code:


Tanning
160-R-140/11,1

Dimensions

Lamp Length Nominal	1760 mm
Base Face to Base Face (max.)	1763,8 mm
Base Face to Pin (max.)	1770,9 mm
Diameter	38 mm
Base	G13 Bi-Pin
Reflector angle	210 °

Electrical Data (nominal values)


Lamp Wattage	160 W
Lamp Current	1,6 A
Lamp Voltage	105 V
Compensation	18 µF
Ballast ¹⁾	160 W
Recommended Starter	according to EN 60155
Lamp color:	




Physical Data (nominal values)

UVA Radiant Flux	40 W
Typical Irradiance in bed ²⁾	280 W/m ²
B/A Ratio (UVB:280-315 nm)	4,2 %
E_{er} (250-400 nm)	140 mW/m ²
E_{er} (320-400 nm)	22,1 mW/m ²
E_{er} (250-320 nm)	117,9 mW/m ²
NMSC Ratio (≤ 320 nm / > 320 nm)	11,1
Useful Life (recommended)	650 h

Recommended Exposure Times³⁾

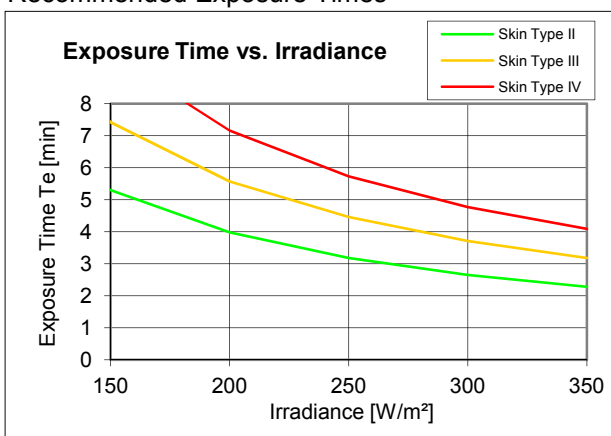

Relative Spectral Radiant Flux

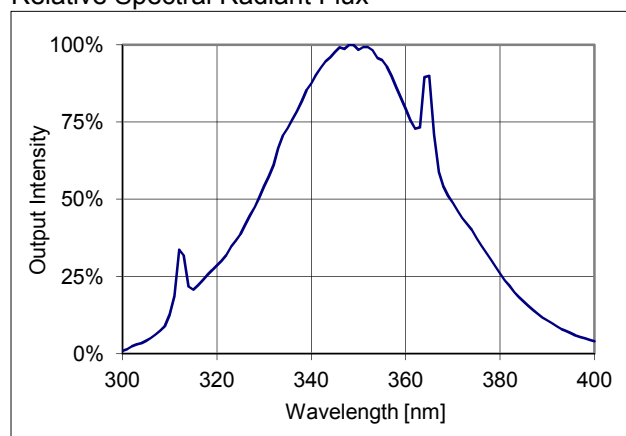

LightTech Lamp Technology Ltd.
H-2120 Dunakeszi Hegyregjáró u.1.

Tel:+36 /27/541-800
Fax:+36 /27/390-099

info@lighttech.hu
www.lighttech.hu

1) Recommended ballast

2) Please contact the manufacturer of your sunbed for the correct value

3) The effective dose is derived from the ultraviolet action curve in accordance with IEC 60335-2-27:2002 and EN 60335-2-27:2003

Data are given under conditions of optimum UV irradiance according to IEC 61228:2008 . Subject to modification.